



www.soflooring.com

Lee Floorstok
Unit B1 The Dresser Centre
Whitworth Street
Manchester
M11 2NE
Tel: 0161 231 8080
Fax: 0161 231 8787
Web: leefloorstok.com

Data Sheet

SO SELECT

CARPET TILES

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For carpet tiles use SO Tack from our adhesive range.

Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use.

Tiles may be laid broadloom or tessellated only.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately.

For detailed information, please consult the So Flooring Products cleaning and maintenance guide.

It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of suitable barrier matting, such as SO Klean also available from SO Flooring Products.


Style:	Tufted Loop Pile
Yarn Construction:	100% Solution Dyed Polypropylene
Tuft Gauge:	1/10"
Pile Yarn Weight:	370 gsm
Pile Height:	2.5mm (+/- 0.5mm)
Total Weight:	3,660 gsm (Tile)
Pile Density:	142,000 /m ²
Thickness:	5.5mm (+/- 0.5mm)
Backing:	100% Envirobase (Minimum of 75% recycled material)
Tile Size:	50cm x 50cm
Anti-static:	<2Kv body voltage. Suitable for use with computers
Classification:	Light Office / Commercial Areas
Luxury Class:	LC1
Colour fastness:	To Light - BS EN ISO105-B02: Better than 6
	To Water - BS EN ISO105-E01: 4-5
	To Shampoo - BS 1006 - UK - TB: 4 - 5
	To Rubbing - BS EN ISO105-X12: 4 - 5
Flammability:	Floorcoverings tested to BS4790 Low Radius of Char
Warranty:	5 Years
VOC Content:	E1 in relation to EN 14041:2004

SO SELECT


CARPET TILES




Black

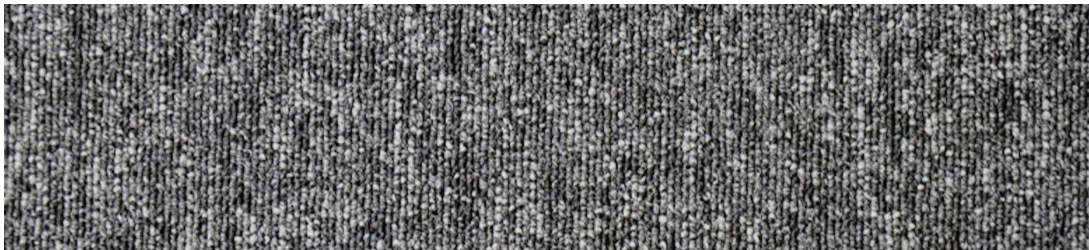


Light Grey

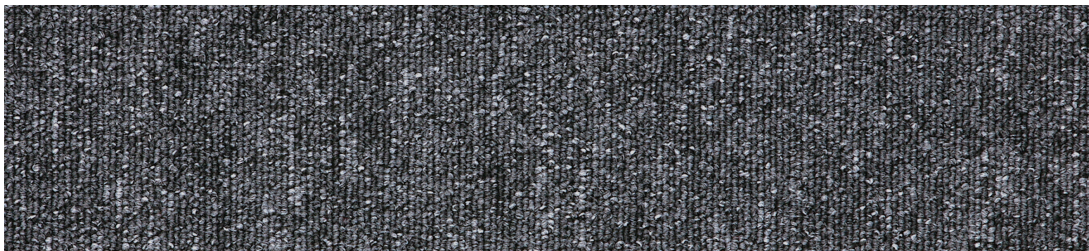

Dark Grey

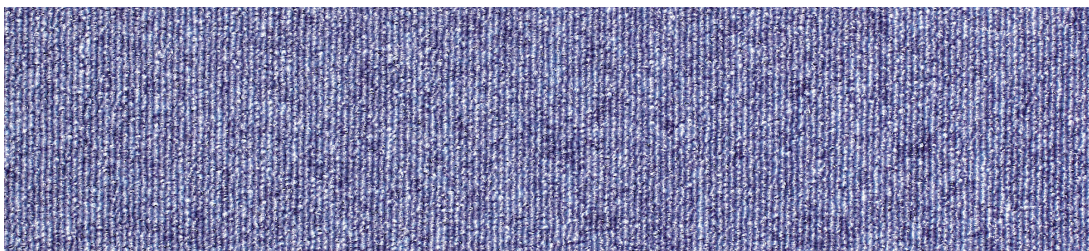

Light Blue

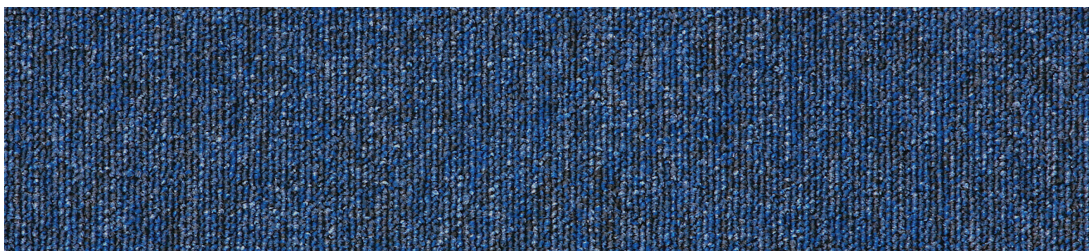

Dark Blue